

PosiTector[®] SmartLink

Wirelessly connect PosiTector probes to your smart device



A Smart New Way to Measure: PosiTector SmartLink and free mobile app turns your cell phone or tablet into a virtual PosiTector gage

Made for
iPod iPhone iPad

Made for
Android™

DeFelsko[®]
The Measure of Quality

PosiTector® SmartLink

Wirelessly connect PosiTector probes to your smart device.

A Smart New Way to Measure

PosiTector SmartLink and free mobile app turns your cell phone or tablet into a virtual PosiTector gage

- Intuitive easy-to-use touch screen operation
- Every reading is instantly transmitted to your smart device
- Tri-color LED provides immediate feedback in dark and noisy environments
- Accepts coating thickness, environmental and surface profile probes
- Lightweight and compact design—uses one AAA battery

Unprecedented Mobile Integration (No internet connection required)

Take full advantage of the simplicity and utility of your smart device including touch screen, keyboard, microphone, camera, email, WiFi, Bluetooth, cellular, dictation tools and more

- Auto-pairing Bluetooth Low Energy connection works up to 10m away (30 feet)
- Create and save professional PDF reports quickly and easily
- Add images to individual readings or batches using the camera or area within an image*
- Annotate images using drawing tools— ideal for identifying a specific location or area within an image
- Rename batches and add notes using the keyboard or microphone
- Real time graphing and statistical analysis with the swipe of a finger

Seamless Online Integration with an Internet Connection

Share, backup, synchronize and report measurement data via email, apps and the cloud


- AutoSync mode instantly backs up every reading to the cloud*—No account required!
- Restore data from the cloud to any smart device—add readings, notes and images
- Live synchronization with your PosiSoft.net account*
- Share professional PDF reports and CSV data instantly via email, Dropbox, AirPrint™ or other applications on your device

*iOS only



PosiTector SmartLink instantly transmits every reading to your smart device.

Share professional PDF reports and CSV data instantly via email, Dropbox, AirPrint™ or other applications on your device.

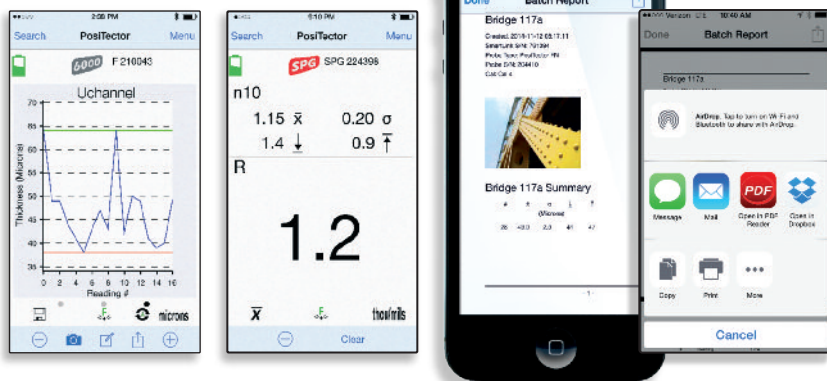

Quick Connect



Coating Thickness



Surface Profile



Surface Profile



Environmental Conditions

PosiTector SmartLink accepts PosiTector 6000, SPG, RTR-H, and DPM probes easily converting to a coating thickness gage, surface profile gage or dew point meter.

SmartLink Comes Complete with free PosiTector App, AAA battery, protective rubber holster, belt clip, wrist strap, instructions, two (2) year warranty. Probes purchased separately.

DeFelsko®
The Measure of Quality

DeFelsko Corporation ■ 800 Proctor Ave. ■ Ogdensburg, New York 13669-2205 USA
Toll Free 1-800-448-3835 ■ Tel: +1-315-393-4450 ■ Fax: +1-315-393-8471
techsale@defelsko.com ■ www.defelsko.com

